


AGPW-A-25-F

固定式收放线装置

Winding device(fixed)

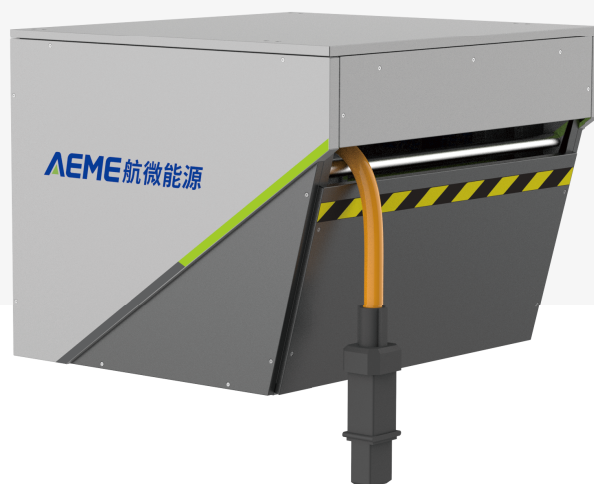

- 应用于民航机场, 配合飞机地面电源使用, 电动收放400Hz电缆。
It is used in civil aviation airport to cooperate with the ground power supply of the aircraft. It is an electric 400Hz cable.
- 支持多种安装方式, 适用于廊桥、地面安装。
It supports multiple installation methods and is suitable for gallery bridge and ground installation.
- 采用独有专利滑环防扭技术, 能有效保护400Hz电缆, 延长电缆使用寿命。
The unique patented slip ring anti-twist technology can effectively protect the 400 Hz cable and prolong the service life of the cable.



变频调速 / Frequency Conversion Speed Regulation

收放线变频调速控制, 运行平稳

Variable frequency speed control,
stable operation.



线缆保护 / Cable Protection

限位保护, 防止电缆过度收放

Limit protection to prevent excessive retraction
and release of cables.



操作简单 / Easy to Operate

易于维护

Easy to maintain.



产品型号/Product model	AGPW-A-25-F
控制电/Control Electricity	
额定电压/Rated voltage	380V
额定频率/Rated frequency	50Hz
连接方式/Connection mode	3P+N+PE
400Hz交流/400Hz AC	
额定电压/Rated voltage	115V/200V
额定容量/Rated capacity	90kVA
额定频率/Rated frequency	400Hz
额定电流/Rated current	261A
保护/Protect	
收线终端限位保护/Take-up terminal limit protection	具备/Available
放线终端限位保护/Pay-off terminal limit protection	具备/Available
400Hz插头插入互锁保护/400Hz plug insertion interlock protection	具备/Available
过电流保护/Overcurrent protection	具备/Available
过压保护/Overvoltage protection	具备/Available
过载保护/Overload protection	具备/Available
环境/Environment	
运行温度/Operating temperature	-50°C~60°C
相对湿度/Relative humidity	0~100% (无凝露) / 0 ~ 100% (no condensation)
结构/Structure	
尺寸(长*宽*高)/Dimensions (L * W * H)	1050*1000*800mm
重量/Weight	350kg (含25m电缆) / 350 kg (with 25m cable)
其他/Other	
防护等级/Protection degree	IP55